


THERMALINETM

MODEL T20 S

The model T20 S is a freestanding medium capacity plate heat exchanger. It is available in multiple frame sizes using either carbon steel or stainless steel. It can accommodate flow rates up to 200 gallons per minute. Plate gaskets are FDA approved EPDM or NBR clip style.

(Other materials are available upon request)

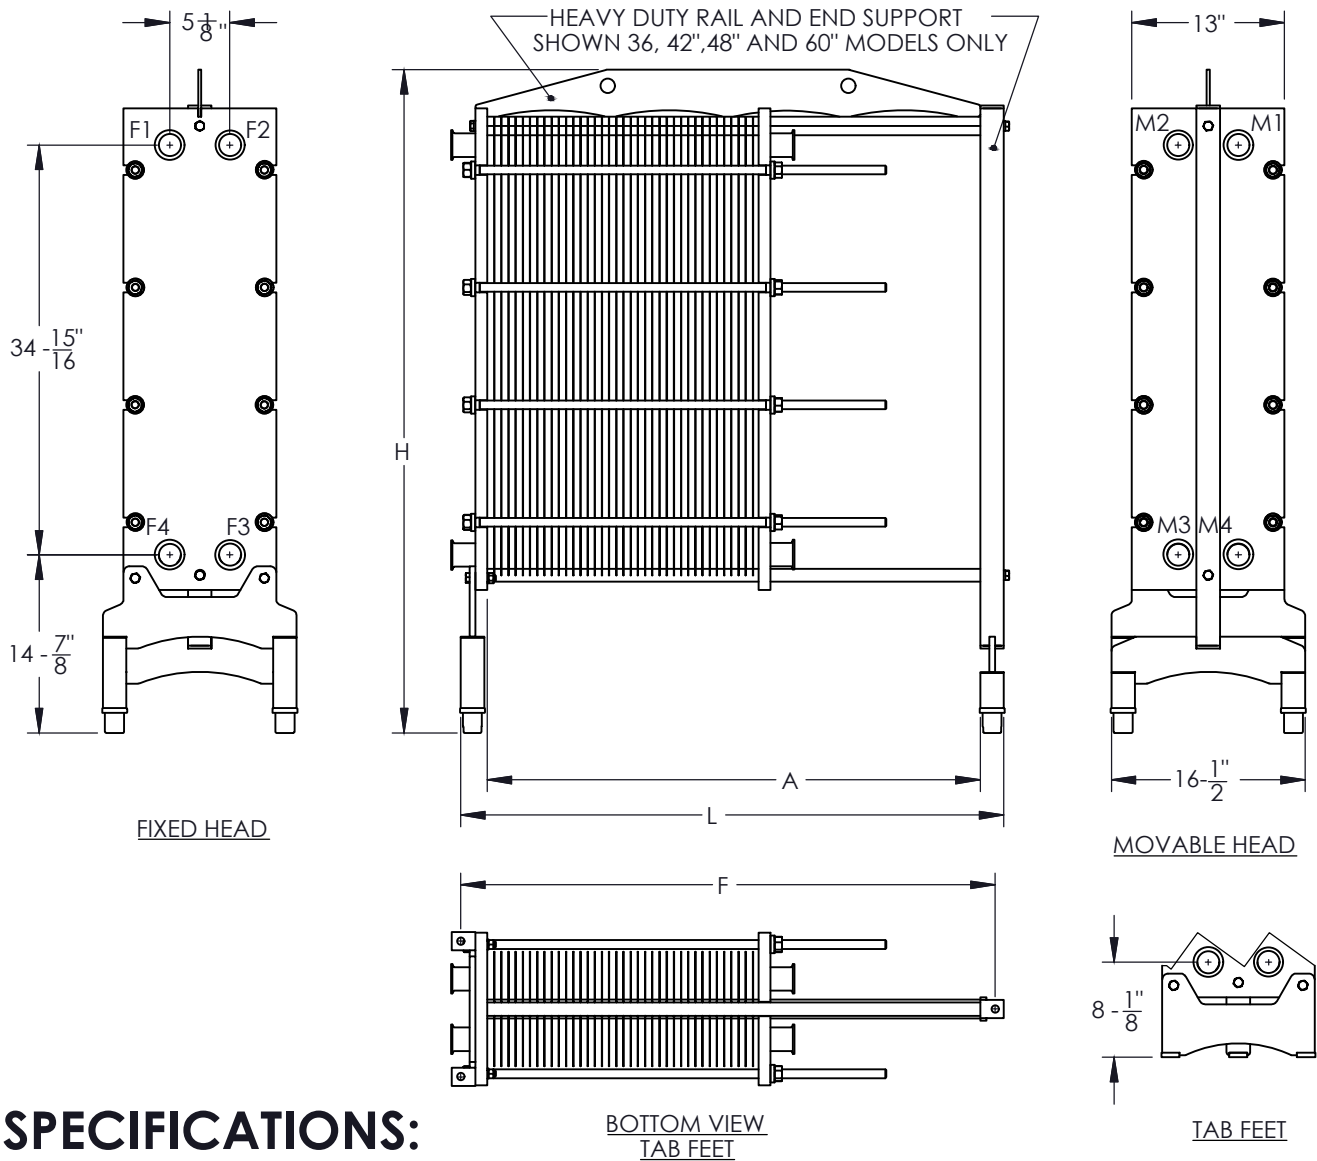

SPECIFICATIONS:

FRAME SIZE "A"	PLATE CAPACITY	FEET STYLE	H	L	F	HEAT TRANSFER AREA PER PLATE 2.15 SQ. FEET
24"	53	TAB	45-7/8"	29"	27-1/2"	FIXED/MOVABLE HEAD PORT CONNECTIONS 2" CLAMP (STANDARD)
24"	53	ADJ.	53"	28-1/4"	-	INTERMEDIATE PORT CONNECTION 2" CLAMP (STANDARD)
36"	111	TAB	49-3/16"	41"	39-1/2"	FRAME DESIGN 150 PSI (STANDARD) TESTED @ 200 PSIG
36"	111	ADJ.	56-1/4"	40-1/4"	-	300 F MAX OPERATION TEMPERATURE DEPENDING ON GASKET MATERIAL
42"	141	ADJ.	56-1/4"	47"	-	
48"	161	ADJ.	56-1/4"	53"	-	
60"	221	ADJ.	56-1/4"	65"	-	

ALL DIMENSIONS ARE APPROXIMATE AND SUBJECT TO CHANGE

2021